

15



handles, fittings for doors, tables and beds



Concealed hinges for non-rebated doors	15.3 – 15.10
Door hinges for rebated doors	15.11 – 15.12
Hobes locks	15.13 – 15.16
Handles	15.17 – 15.22
Explanatory notes	15.17
Door handrails	15.24
Ventilation grids	15.25 – 15.26
Duct vents	15.27
Strips for worktops	15.28
Lifters and bed fittings	15.29 – 15.34
Fittings for toilet cubicles	15.35 – 15.36
Hettich	
Bed fittings	15.37 – 15.40
Fittings for upholstery production	15.41 – 15.42



concealed hinges for non-rebated doors

Concealed hinge K2460 for medium heavy non-rebated doors

code	name
401655	hinge K2460 satin chrome
402478	hinge K2460 satin nickel
255978	hinge holder K2460 for steel door-frame ¹⁾
255979	hinge fastener K2460 for door-frame lining ¹⁾
256292	hinge fastener K2460 for door-frame lining + screw ¹⁾
256293	hinge fastener K2460 for door-frame lining + screw + cup ¹⁾





¹⁾ For accessories, see p. 15.9

Advantages:

user-friendly adjustment in all 3 directions
hinge mounting holes identical with the most common hinges on the market
elegant design

Hinge technical specifications:

minimum door thickness: 25 mm
load capacity for 2 hinges: 60 kg
3 hinges: 52 kg
door dimensions: 600/900 × 2,100 mm
adjustment in all 3 directions:
height (Z): ± 3 mm
right-left (X): ± 3 mm
forward-backward (Y): ± 1.5 mm

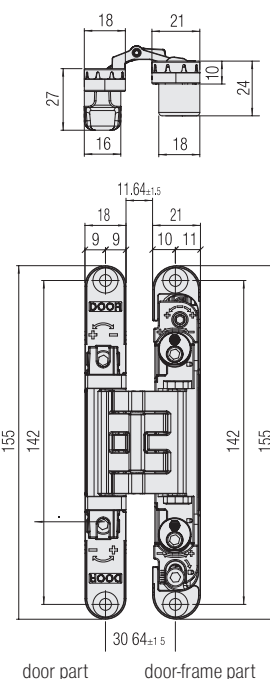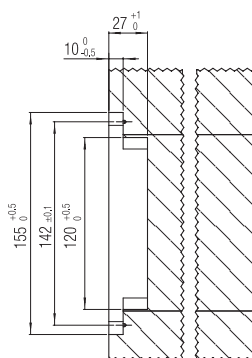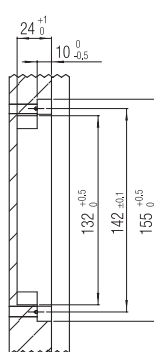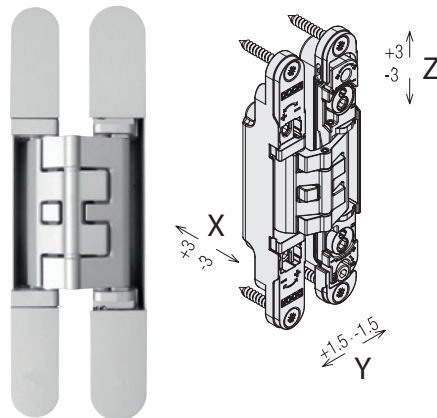


Templates

Mounting template for Kubica hinge

The template includes:
universal frame
insert depending on the hinge type

Mounting template allows precise milling of mounting holes for concealed hinges.

code	name
256045	mounting template – universal frame
256046	template – insert for hinge K2460

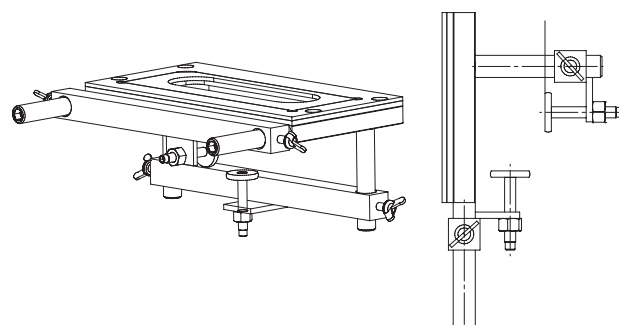

HANDLES, FITTINGS FOR DOORS, TABLES AND BEDS

concealed hinges for non-rebated doors



Concealed hinge K5080 for heavy non-rebated doors

code	name
255980	hinge K5080 satin chrome
255981	hinge K5080 satin nickel
255982	hinge holder for steel door-frame ¹⁾
255983	hinge fastener for door-frame lining ¹⁾

¹⁾ For accessories, see p. 15.9

Hinge cover cap for screwing





Pluses:

user-friendly adjustment in all 3 directions
hinge mounting holes identical with the most common hinges on the market
timeless design

Hinge technical specifications:

minimum door thickness: 40 mm
load capacity for 2 hinges: 80 kg
door dimensions: 600/900 × 2,100 mm
adjustment in all 3 directions:

height (Z): ± 3 mm
right-left (X): ± 3 mm
forward-backward (Y): ± 1 mm

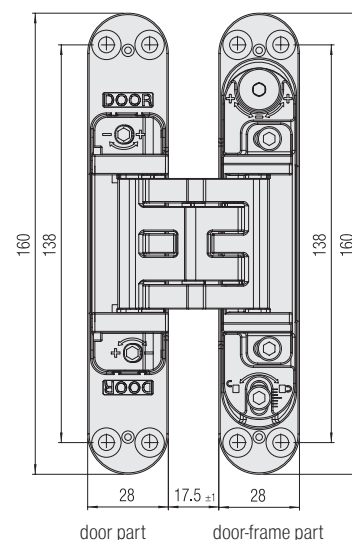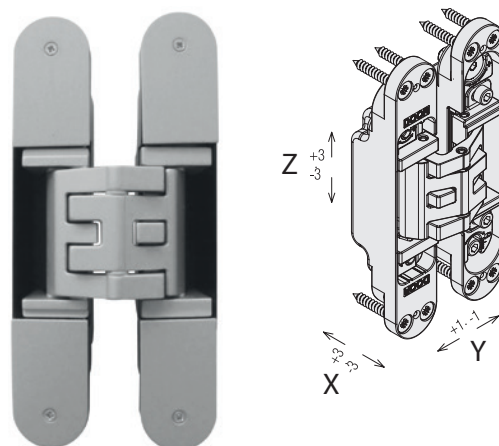


Templates

Mounting template for Kubica hinge

The template includes:
universal frame
insert depending on the hinge type

Mounting template allows precise milling of mounting holes for concealed hinges.

code	name
256045	mounting template – universal frame
256047	template – insert for hinge K5080

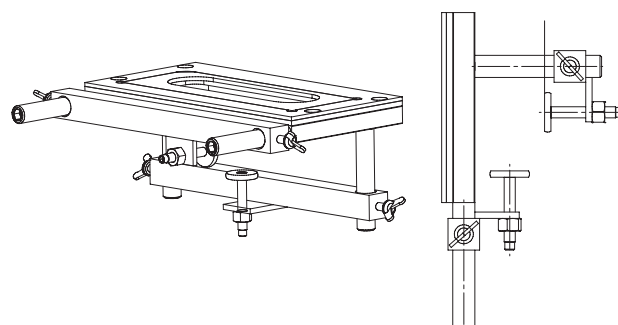



concealed hinges for non-rebated doors

Concealed hinge K6200 for non-rebated doors

code	name
255984	hinge K6200 satin chrome
255985	hinge K6200 satin nickel
255986	door-frame lining fastener ¹⁾

¹⁾ For accessories, see p. 15.9

Pluses:





user-friendly adjustment in all 3 directions
anti-fire finishing
design

Hinge technical specifications:

minimum door thickness:	32 mm	
load capacity for 2 hinges:	45 kg	door height up to 2,100 mm
load capacity for 3 hinges:	60 kg	door height up to 2,100 mm
load capacity for 4 hinges:	60 kg	door height over 2,100 mm

adjustment in all 3 directions:

height (Z):	± 2.5 mm
right-left (X):	± 3 mm / ± 2 mm
forward-backward (Y):	± 1 mm

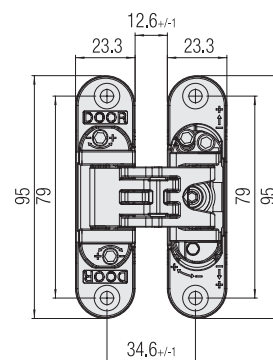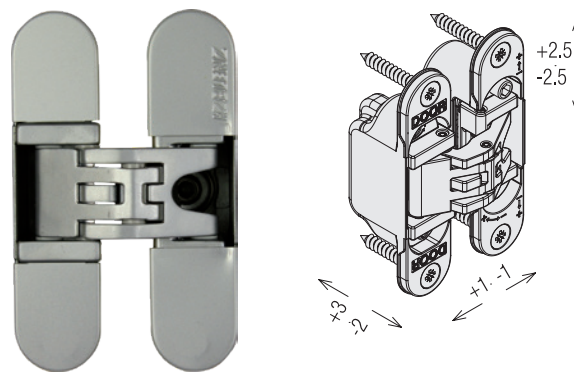


Templates

Mounting template for Kubica hinge

The template includes:
universal frame
insert depending on the hinge type

Mounting template allows precise milling of mounting holes for concealed hinges.

code	name
256045	mounting template – universal frame
256048	template – insert for hinge K6200

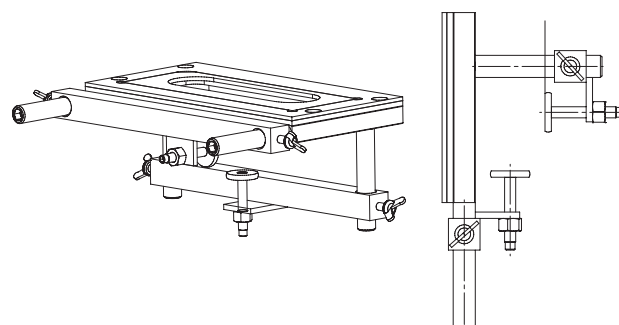

HANDLES, FITTINGS FOR DOORS, TABLES AND BEDS

concealed hinges for non-rebated doors



Concealed hinge K6400 for non-rebated doors

code	name
267620	hinge K6400 satin chrome
267703	hinge K6400 satin nickel

Pluses:





user-friendly adjustment in all 3 directions
design

Hinge technical specifications:

minimum door thickness:	30 mm	
load capacity for 2 hinges:	30 kg	door height up to 2,100 mm
load capacity for 3 hinges:	45 kg	door height up to 2,100 mm

adjustment in all 3 directions:

height (Z):	± 2.5 mm
right-left (X):	$+ 3$ mm / $- 2$ mm
forward-backward (Y):	± 1 mm

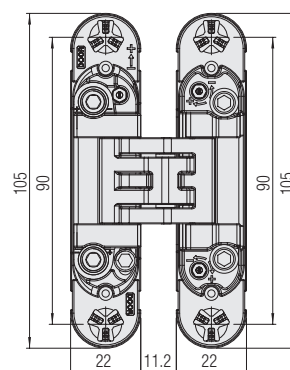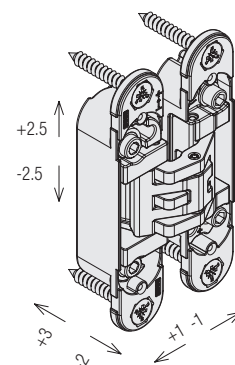


Templates

Mounting template for Kubica hinge

The template includes:
universal frame
insert depending on the hinge type

Mounting template allows precise milling of mounting holes for concealed hinges.

code	name
256045	mounting template – universal frame
268077	template – insert for hinge K6400

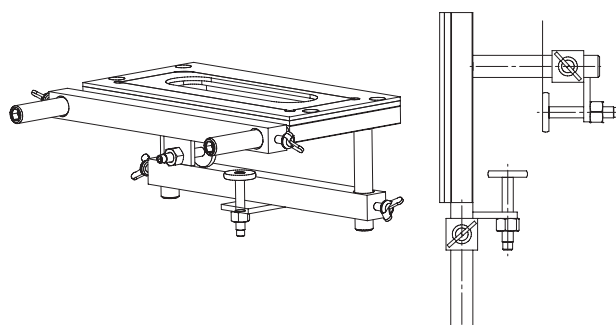



concealed hinges for non-rebated doors

Concealed hinge K6100 for light non-rebated wardrobe doors

code	name
255989	hinge K6100 satin chrome

Pluses:



user-friendly adjustment in all 3 directions
can be used for door thickness from 18 mm

Hinge technical specifications:


minimum door thickness:	18 mm	
load capacity for 2 hinges:	10.5 kg	max. door height: 1,000 mm
load capacity for 3 hinges:	10.5–14 kg	max. door height: 1,500 mm
load capacity for 4 hinges:	14–19 kg	max. door height: 2,000 mm

adjustment in all 3 directions:


height (Z):	± 1.5 mm
right-left (X):	± 1.5 mm
forward-backward (Y):	± 1 mm

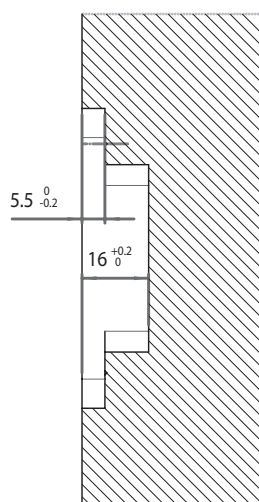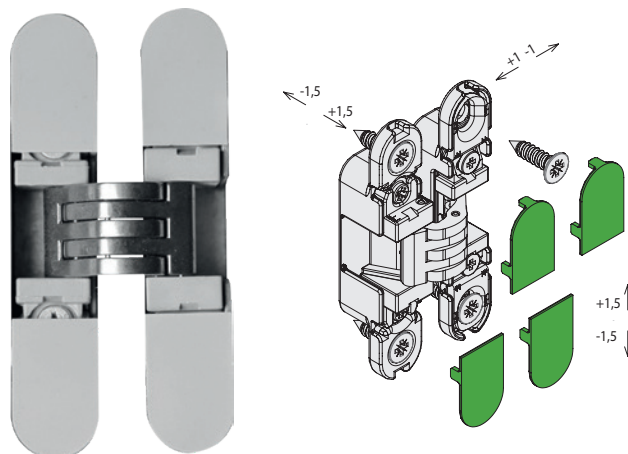

A-A

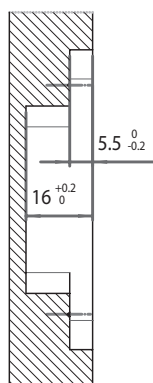

B-B

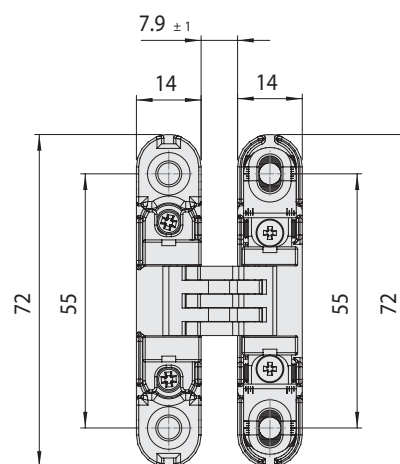



Concealed hinge Symbio 22 for non-rebated doors

code	name
256674	hinge Symbio 22 matt chrome

Concealed hinge adjustable in all 3 directions for non-rebated doors.

Hinge technical specifications:

minimum door thickness: 28 mm

load capacity for 2 hinges: 40 kg door height up to 1,600 mm


For doors higher than 1,600 mm, we recommend using 3 hinges.

adjustment in all 3 directions:


height (Z): ± 1.5 mm

right-left (X): ± 2 mm

forward-backward (Y): ± 1.5 mm



milling of doors and door-frames for hinge Symbio 22

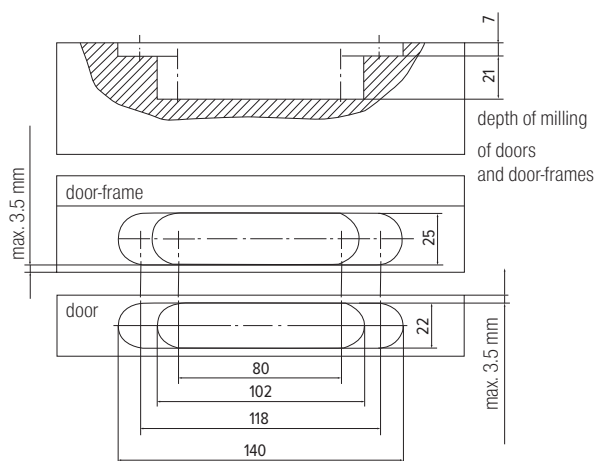




concealed hinges for non-rebated doors


Accessories for concealed hinges




code	name
255978	K2460 hinge holder for steel door-frame

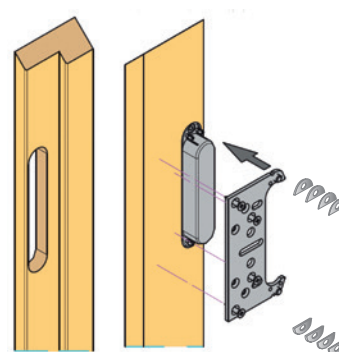

code	name
255979	K2460 hinge fastener for door-frame lining

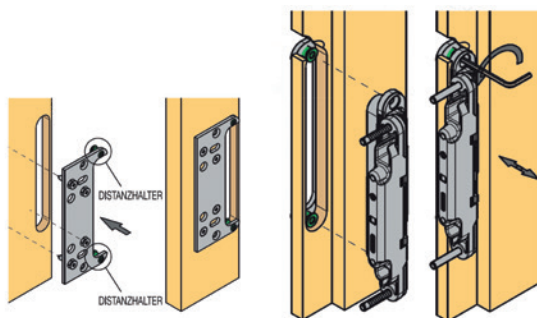


code	name
256292	hinge fastener K2460 for door-frame lining with spacer screw
256294	hinge fastener K5080 for door-frame lining with spacer screw

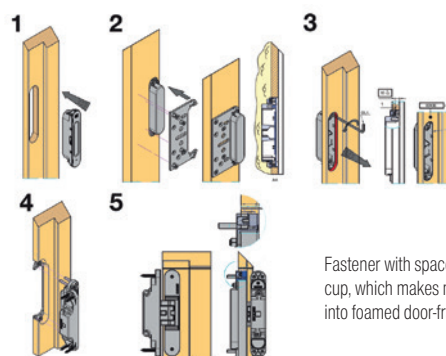


Fastener with spacer screw and ABS cup, which makes mounting of the hinge into foamed door-frame easier.

code	name
256293	hinge fastener K2460 for door-frame lining + screw + cup
256295	hinge fastener K5080 for door-frame lining + screw + cup

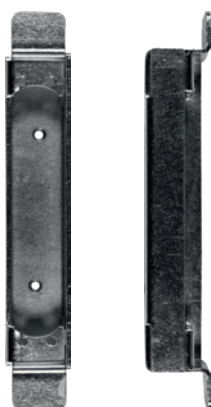


code	name
255982	hinge holder K5080 for steel door-frame

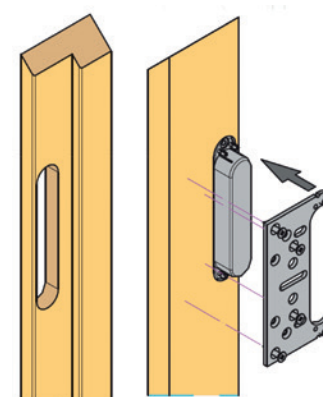

code	name
255983	hinge fastener K5080 for door-frame lining

HANDLES, FITTINGS FOR DOORS, TABLES AND BEDS

concealed hinges for non-rebated doors

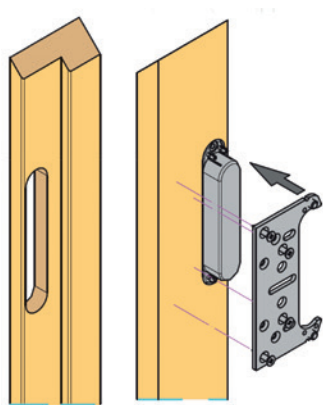

code	name
255986	K6200 hinge fastener for door-frame lining





Our TIP: Did you know that you can hire mounting templates for Kubica hinges? Learn more about this at Customer service (contacts can be found at www.demos-trade.com or on the catalogue cover).



door hinges for rebated doors

Hinge SZ 82

complete hinge adjustable in three directions

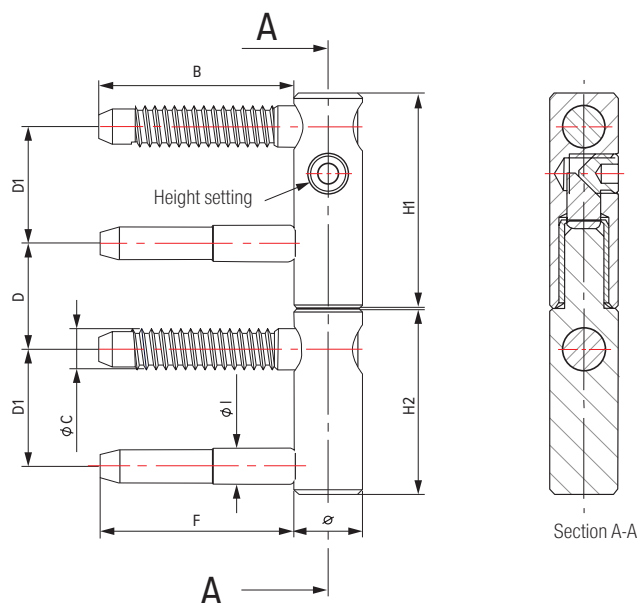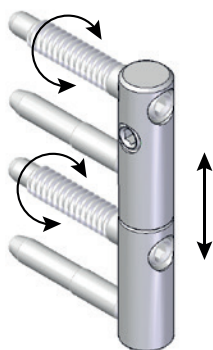

code	surface treatment	hinge diameter	height H1	height H2	pitch D	length of bolt B	pitch D	pitch D1	pin length F	P	diameter C	diameter I	version
256661	yellow zinc	14	44	38	21	40	21	24	40	40	8,2	7.3	standard
256662	white zinc	14	44	38	21	40	21	24	40	40	8,2	7.3	standard
256663	yellow zinc	16	44	38	21	40	24	24	40	40	8,2	7.3	standard
256664	white zinc	16	44	38	21	40	24	24	40	40	8,2	7.3	standard
256665	yellow zinc	20	58	54	29	59	32	32	55	120	9,3	8.7	standard
256666	white zinc	20	58	54	29	59	32	32	55	120	9,3	8.7	standard
259507	yellow zinc	20	58	54	29	59	32	32	55	120	9,3	8.7	protection against disassembly
259508	white zinc	20	58	54	29	59	32	32	55	120	9,3	8.7	protection against disassembly


3 hinges are recommended for one door. The data in the table are given in mm.

Hinge cover cap SZ 82




code	surface treatment	hinge diameter (mm)	cover cap diameter (mm)	height (mm)
256667	matt chrome	14	15	48
256668	matt nickel	14	15	48
256669	stainless steel imitation	14	15	48
256670	matt chrome	16	17	48
256671	matt nickel	16	17	48
256672	stainless steel imitation	16	17	48
256673	matt chrome	20	22	48

door hinges for rebated doors





Mounting template for hinges SZ 82

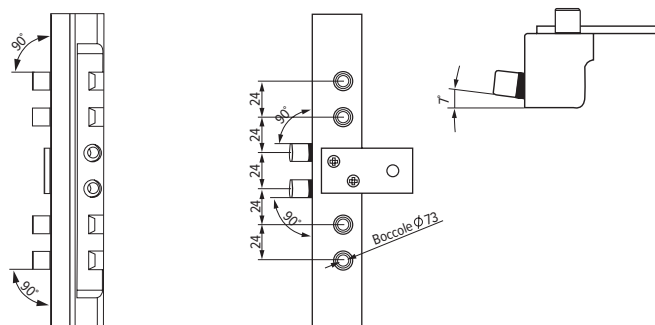

code	name
257211	mounting template for hinges SZ 82, diameter: 14-16 mm
279212	mounting template for hinges SZ 82, diameter: 20 mm

Hinge SZ50

complete hinge for light door

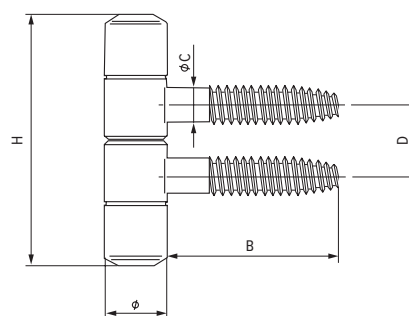


code	surface treatment	hinge diameter (mm)	height H (mm)	length B (mm)	pitch D (mm)	diameter C (mm)
256656	yellow zinc	9	36	25	10	5
256657	white zinc	9	36	25	10	5

3 hinges are recommended for one door leaf.

Hinge SZ 150R

complete hinge adjustable in height, forward and backward

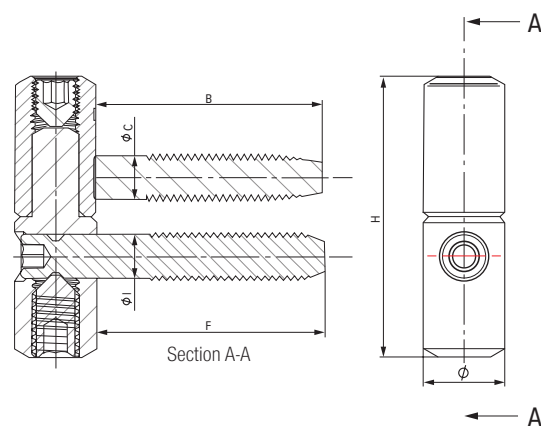

code	surface treatment	hinge diameter (mm)	height H (mm)	length B/F (mm)	pitch D (mm)	diameter C/I (mm)
256658	yellow zinc	14	48	39	13.7	7.5
256659	white zinc	14	48	39	13.7	7.5




Hobes locks

Lock 536

two fits, gearless

Hobes identification: 536
Pitch / depth / axis: 90 / 80 / 50
Orientation: R/L
Design of lock: two fits, gearless, 1 right-left key
Key option: key for key-operated lock (BB)

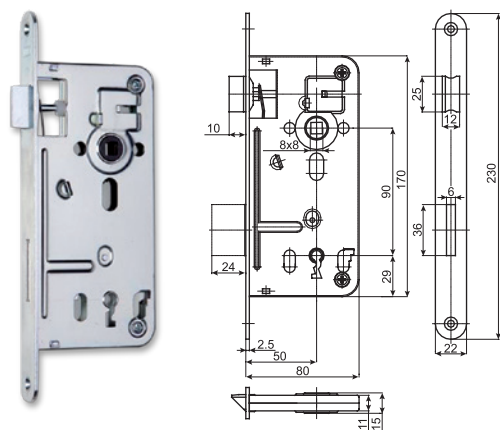


code	surface treatment
260291	white zinc
260292	yellow zinc

Lock 24026

two fits, with gear

Hobes identification: 24026
Pitch / depth / axis: 90 / 80 / 50
Orientation: R/L
Design of lock: two fits, with gear, right-left
Key option: cylinder insert (PZ)

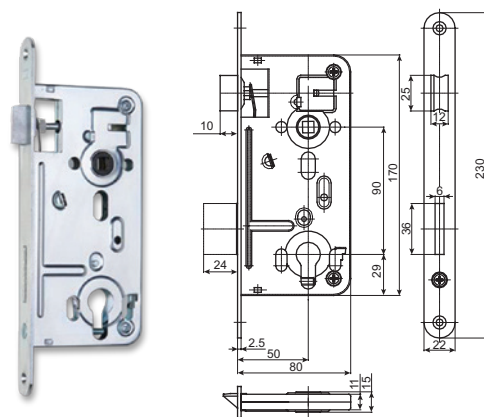


code	surface treatment
260293	white zinc
260294	yellow zinc

Lock 01-15

one fit, gearless

Hobes identification: 01-15
Pitch / depth / axis: 90 / 60 / 40
Orientation: R/L
Design of lock: one fit, gearless, 1 right-left key
Key option: key for key-operated lock (BB)

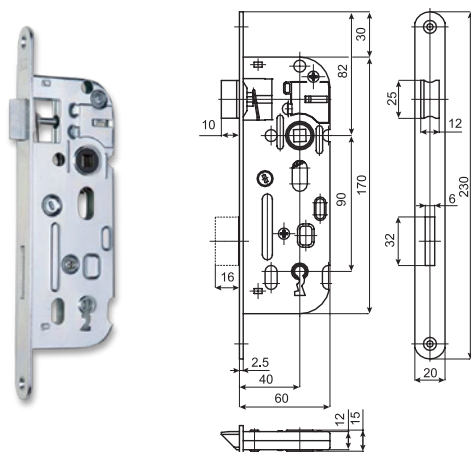


code	surface treatment
260295	white zinc
260296	yellow zinc

Lock 02-04

two fits, with gear

Hobes identification: 02-04
Pitch / depth / axis: 90 / 60 / 40
Orientation: R/L
Design of lock: two fits, with gear, right-left
Key option: cylinder insert (PZ)

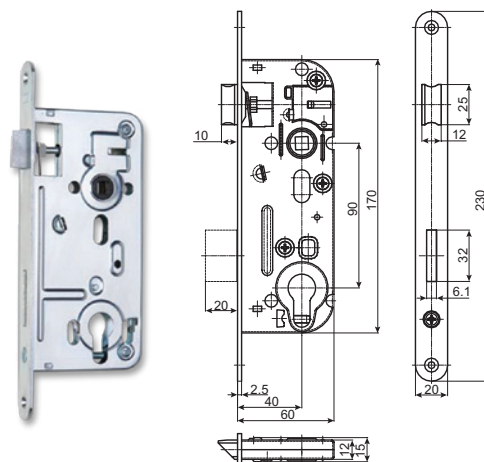


code	surface treatment
260297	white zinc
260298	yellow zinc



Lock 02-06

two fits, with gear

Hobes identification: 02-06
Pitch / depth / axis: 90 / 63 / 45
Orientation: R/L
Design of lock: two fits, with gear, right-left
Key option: cylinder insert (PZ)

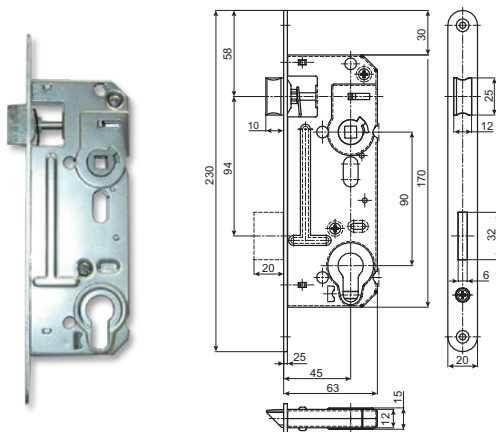


code	surface treatment
260299	white zinc
260300	yellow zinc

Lock K 134

two fits, gearless

Hobes identification: K 134
Pitch / depth / axis: 72 / 80 / 50
Orientation: R/L
Design of lock: two fits, gearless, right-left, 1 key
Key option: key for key-operated lock (BB)

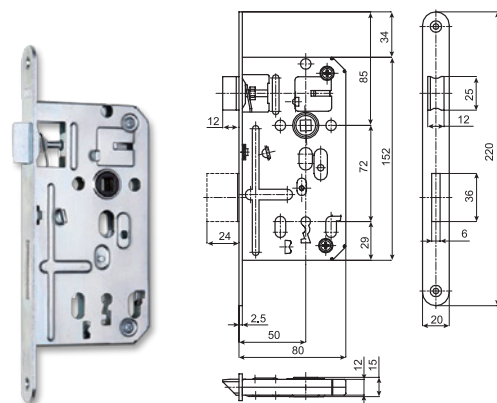


code	surface treatment
260301	white zinc
260302	yellow zinc

Lock K 103

one fit, gearless

Hobes identification: K 103
Pitch / depth / axis: 72 / 60 / 40
Orientation: R/L
Design of lock: one fit, gearless, 1 right-left key
Key option: key for key-operated lock (BB)

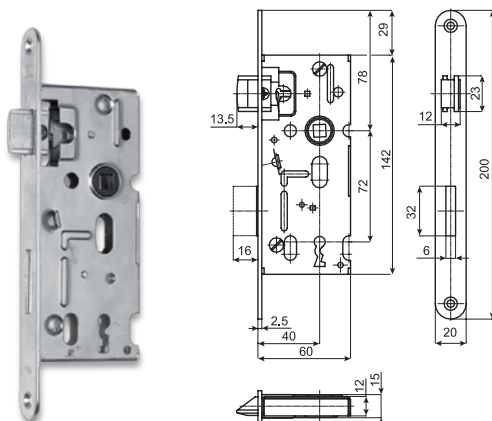


code	surface treatment
260303	white zinc
260304	yellow zinc

Lock K 105

one fit, with gear

Hobes identification: K 105
Pitch / depth / axis: 72 / 60 / 40
Orientation: R/L
Design of lock: one fit, with gear, right-left
Key option: cylinder insert (PZ)

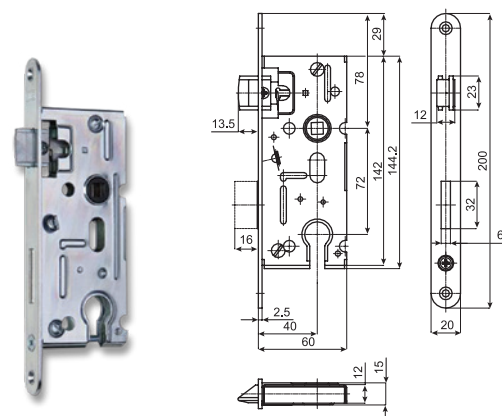

code	surface treatment
260305	white zinc
260306	yellow zinc




Hobes locks and magnetic lock

Lock K 111

one fit, gearless

Hobes identification: K 111
Pitch / depth / axis: 72 / 60 / 40
Orientation: R/L
Design of lock: one fit, gearless, right-left
Key option: WC key

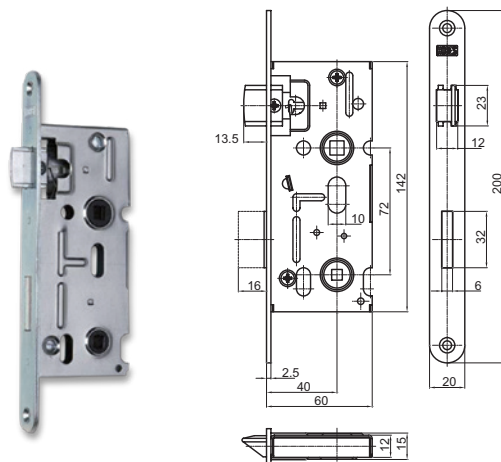


code	surface treatment
260307	white zinc
260308	yellow zinc

Lock 01-08

inter-room lock with bolt blocking

Hobes identification: 01-08
Pitch / depth / axis: 20.5 / 60 / 40
Orientation: P
Design of lock: inter-room lock with bolt blocking, gearless, right
Key option: mechanical blocking

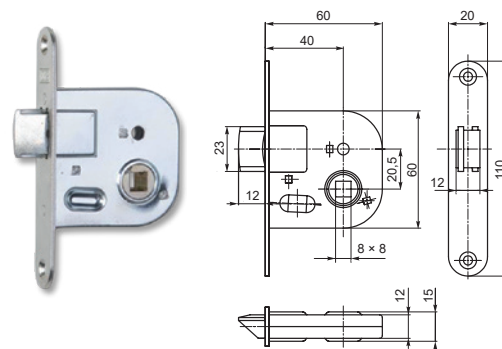


code	surface treatment
260309	white zinc
260310	yellow zinc

Lock K 119

three-point lock, two fits

Hobes identification: K 119
Pitch / depth / axis: 90 / 80 / 50
Orientation: R/L
Design of lock: three-point lock, two fits, with gear
Key option: cylinder insert (PZ)

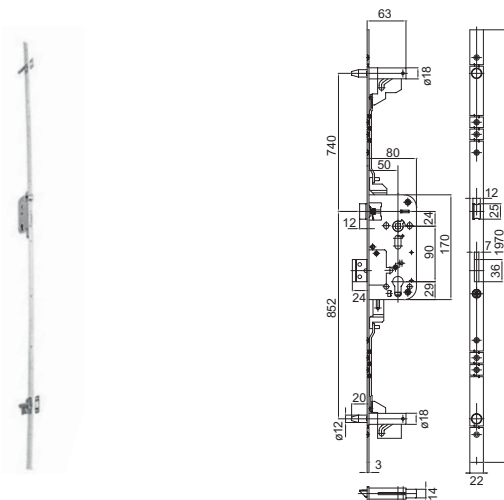


code	surface treatment
260327	white zinc

Magnetic lock 72/55

inter-room lock with bolt blocking

Lock orientation: right-left
Surface treatment: white zinc

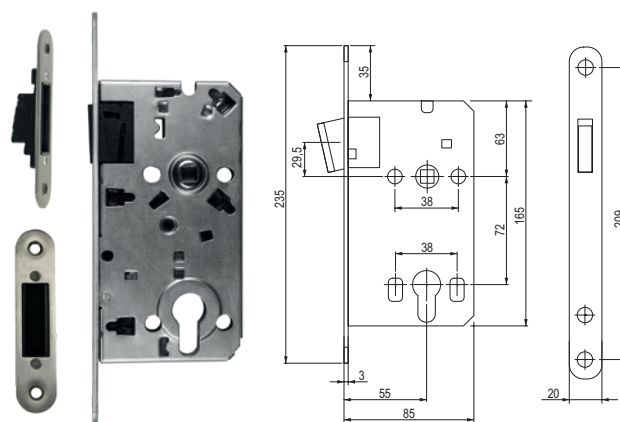


code	key version
183016	PZ
183015	BB
183017	WC



Striker plate K 192

angular, universal

Hobes identification: K 192
 Pitch / depth / axis: 190 × 24 × 8
 Orientation: R/L
 Design of lock: right-left striker plate for 72 + 90 mm pitch

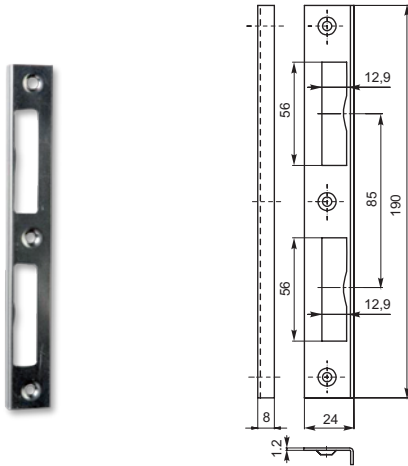


code	surface treatment
260311	white zinc
260312	yellow zinc

Striker plate K 193

universal, with plastic box


Hobes identification: K193
 Pitch / depth / axis: 200 × 20.6 × 7.2
 Orientation: R/L
 Design of lock: universal, with plastic box, for 72 + 90 mm pitch

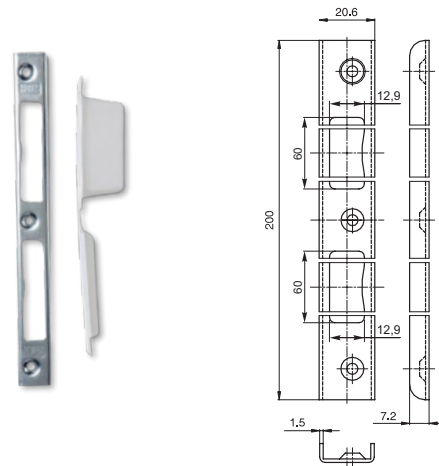

code	surface treatment
260315	white zinc
260316	yellow zinc

Striker plate 1/1

angular

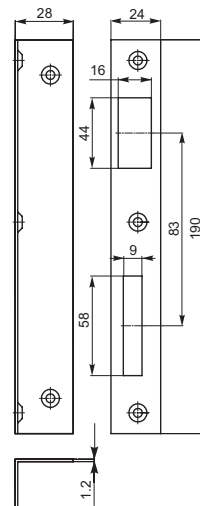

model	1/1	1/1	1/1	1/1
code	354032	260320	354033	260322
orientation:	left	left	right	right
surface treatment:	white zinc	yellow zinc	white zinc	yellow zinc
for lock pitch:	90/72	90/72	90/72	90/72
length / width / depth:	190 × 24 × 28	190 × 24 × 28	190 × 24 × 28	190 × 24 × 28



Locking method

There are several abbreviations in the catalogue that indicate the design in which the fitting can be purchased. Select the design carefully with respect to which doors you will place the fitting on – interior or security doors.


Abbreviations indicate lock type:

BB		lock with a hole for a classic key for key-operated lock – interior doors
PZ		lock for a key with cylinder insert – for entrance doors, offices
WC		set used for bathrooms and toilets, on the inside of the door there is a lock (so called "turn and release"), from the opposite outer side, there is a rose with a groove for opening in case of emergency
KPZL		set of knob – left handle, lock with cylinder insert, handle inside, knob outside
KPZR		set of knob – right handle, lock with cylinder insert, handle inside, ball outside

Orientation of fittings

The following picture will help you to determine the direction of door opening and related orientation of the fitting:

Knob / left handle
KPZL
Handle / left handle
PZL

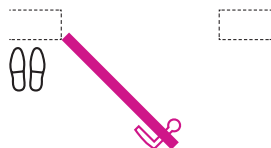


Left door, inward opening

Knob / left handle
KPZR
Handle / left handle
PZR




Right door, inward opening

Knob / left handle
KPZR
Handle / left handle
PZR



Left door, outward opening

Knob / left handle
KPZL
Handle / left handle
PZL



Right door, outward opening

Tavira

black matt



	Tavira BB	Tavira PZ	Tavira WC
handle	363375	363614	363615



Jade


nickel satin matt



	Jade BB	Jade PZ	Jade WC
handle	363373	363601	363602

Ruby


nickel satin matt

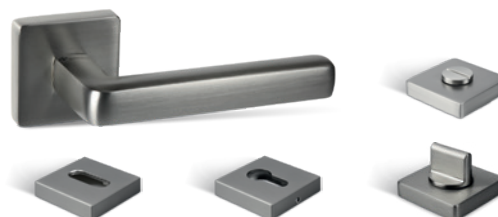

	Ruby BB	Ruby PZ	Ruby WC
handle	363376	365992	365993

Giada

nickel satin matt

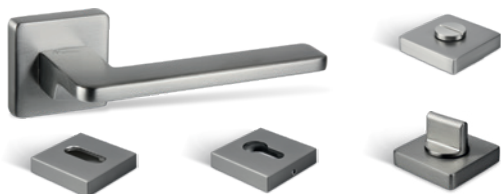

	Giada BB	Giada PZ	Giada WC
handle	363374	363608	363609

N Blade



colour	Blade BB	Blade PZ	Blade WC
chrome satin	370308	370322	370345
black matt	404928	404937	404938




Luck

nickel satin matt



Luck BB	Luck PZ	Luck WC
248296	248297	248298

Turn



colour	Turn BB	Turn PZ	Turn WC
chrome	223385	223386	223387
nickel satin matt	363105	363106	363107
nickel satin matt, with black strip	399082	399085	399084
satin matt nickel, with white strip	399083	404831	404832

Era

matt stainless steel




Era BB	Era PZ	Era WC
248280	248281	248282

Dara

lacquered brass patina



Dara BB	Dara PZ	Dara WC
359744	359747	359750



Vision


matt stainless steel



Vision BB	Vision PZ	Vision WC	KPZR	KPZL
359713	359714	359715	359716	364584

Vision HR

matt stainless steel

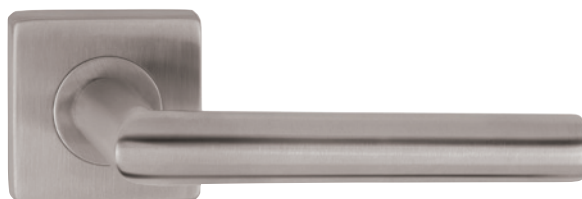

Vision HR BB	Vision HR PZ	Vision HR WC
359723	359724	359725

Gulf

matt stainless steel



Gulf BB	Gulf PZ	Gulf WC
359717	359718	359719

Gulf HR

matt stainless steel



Gulf HR BB	Gulf HR PZ	Gulf HR WC
359726	359727	359728



Cuboid HR

matt stainless steel



Cuboid HR BB	Cuboid HR PZ	Cuboid HR WC
359729	359730	359731

Cuboid BA

matt chrome



Cuboid BA BB	Cuboid BA PZ	Cuboid BA WC
359741	359742	359743

Lisa

matt stainless steel




Lisa BB	Lisa PZ	Lisa WC
359720	359721	359722

Dara HR

chrome satin




Dara HR BB	Dara HR PZ	Dara HR WC
359753	359754	359756



Era

matt stainless steel



			
Era BB	Era PZ	Era WC P	Era WC L
248283	248284	248286	249391

Harmonia

stainless steel




pitch/mm	Harmonia PZ	Harmonia KPZ
72	359732	359735
90	359733	359736
92	359734	359737

Stop P541



Stoppino door stop

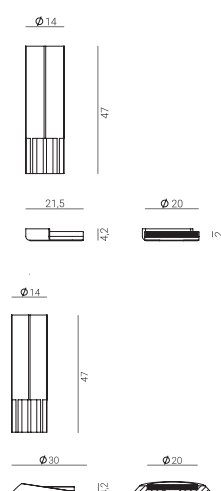

lacquered brass patina	matt chrome	matt nickel	polished lacquered brass
359805	359806	359807	359804



Example of use

code


405975



HANDLES, FITTINGS FOR DOORS, TABLES AND BEDS


handles





Ola handrail


matt stainless steel / polished



matt stainless steel / polished	drilling pitch C (mm)	length L (mm)	height H (mm)	diameter Ø (mm)
252448	281	300	70	19
252449	381	400	70	19
252450	481	500	70	19
252451	581	600	70	19

Hela handrail


matt stainless steel

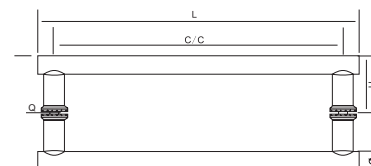

matt stainless steel / polished	drilling pitch C (mm)	length L (mm)	height H (mm)	diameter Ø (mm)
252452	200	300	75	19
252453	300	400	75	19
252454	400	500	75	19
252455	500	600	75	19

Ugo handrail

matt stainless steel / polished

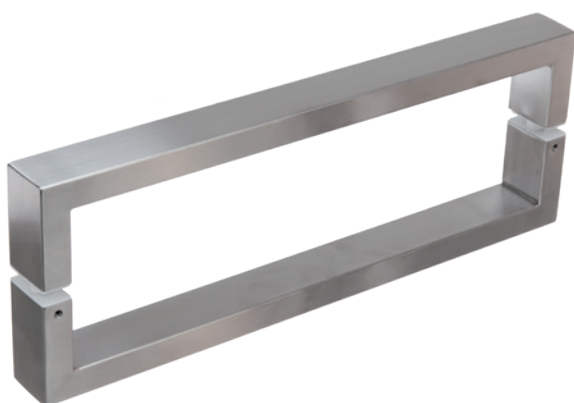

stainless steel	drilling pitch C (mm)	length L (mm)	width D (mm)	height H (mm)
315942	300	320	40	20
315943	400	420	40	20
315944	600	620	40	20



ventilation grids

Metal ventilation grids




Metal ventilation grids

Anodised aluminium

code	width (mm)	length (mm)
320797	60	250
320793		400
320794		500
320798		600
320815		800
320813		1,000
320811	80	250
320796		400
320795		500
320799		600
320806		800
320807		1,000



code	width (mm)	length (mm)
320809	100	250
320810		400
320831		500
320808		600
320805		800
320801		1,000
320821	130	500
320835		600
320871		400
320848		800
320873	150	1,000
320837		400
320804		500
320817		600
320814		800
320800		1,000

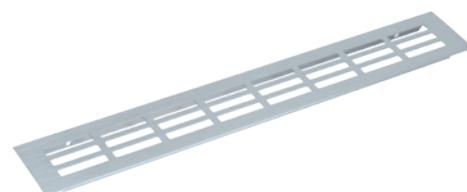

Stainless steel imitation

code	width (mm)	length (mm)
313690	60	250
313687		400
313689		500
320828		600
320839		800
320893		1,000
320926	80	250
313688		400
313691		500
313692		600
320852		800
320855		1,000

code	width (mm)	length (mm)
320945	100	250
320916		400
320840		500
320859		600
320842		800
320860		1,000
320883	150	800
320830		1,000



ventilation grids




White

code	width (mm)	length (mm)
320823	60	250
320803		400
320802		500
320850		600
320863		800
320874	80	250
320812		400
320816		500
320818		600
320820		800
320824	100	1,000
320825		250
320877		400
320843	150	400
320836		500
320862		600
320885		800
320832		1,000






Anodised bronze

code	width (mm)	length (mm)
320822	60	400
320819		500
320827	80	500
320826		400

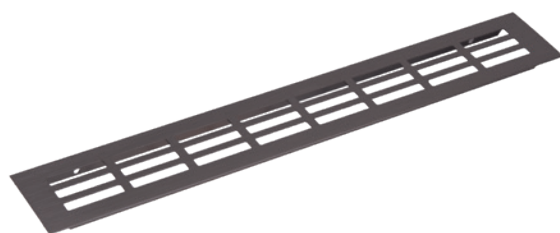

Anodised gold

code	width (mm)	length (mm)
320849	60	400
320833	80	400
320900	100	400

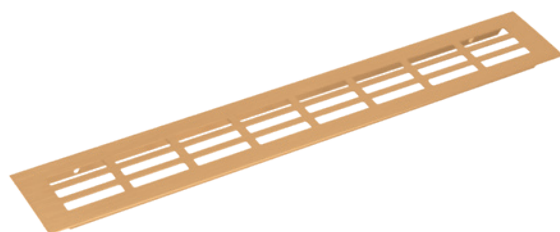




duct vents

Duct vent 35 mm

code	colour
153453	white
153460	brown
153459	black
153458	beech
153461	cherry




- 35 mm duct vents are available in all colours depending on particular requirements (delivery conditions upon request)

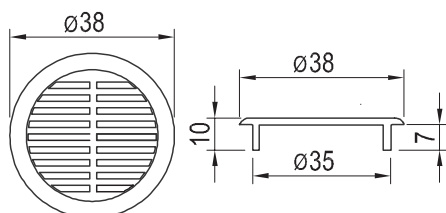


Duct vent, 50 mm

height: 15 mm	height: 8 mm	colour
11381	215755	white
11382	215756	brown
11380	215757	black
11383	215758	beech
100192	215759	cherry
11379	215760	grey

- 50 mm duct vents are available in all colours depending on particular requirements (delivery conditions upon request)

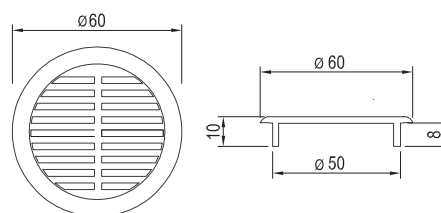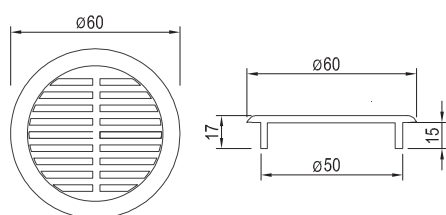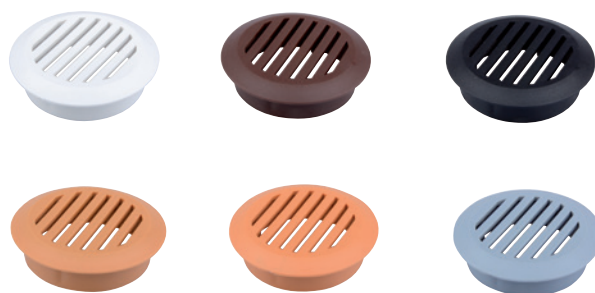




Strips for worktops



Strips for worktops

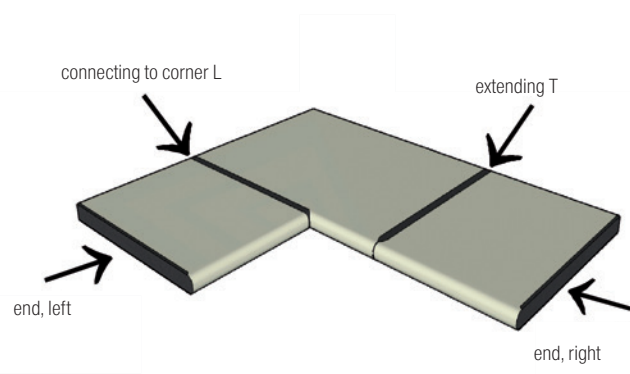

Corner connecting strip L/R, 38 mm

code	colour
313668	aluminium
313677	stainless steel



End profile, 38 mm

code	description	colour
313669	left	aluminium
313678	left	stainless steel
313670	right	aluminium
313679	right	stainless steel



Extending connecting strip L/R, 38 mm

code	colour
313671	aluminium
313680	stainless steel



End profile 38 mm, 0° radius


code	description	colour
349449	left	aluminium
349450	left	stainless steel
349451	right	aluminium
349452	right	stainless steel



Corner connecting strip / extending L/R 38 mm, 0° radius

code	colour
349448	aluminium
349447	stainless steel






lifters and bed fittings

Bed fitting for gas piston

code	description
224332	zinc

- the set contains a pair of bed lifters
- for completeness, it is necessary to order 2 gas pistons as required
- opening angle max. 40°



Gas piston for bed mechanism

code	force
224333	350 N
224334	450 N
224335	500 N
224336	650 N
224337	750 N
224338	1,000 N
224339	1,200 N
224340	1,350 N
224341	1,500 N





- 2 pistons are required for one bed fitting


Examples of use

bed type	width (cm)	recommended pistons
simple bed with transversal opening	60-70	2 × 350 N
	80-90	2 × 450 N
simple bed with longitudinal opening	80-90	2 × 500 N
	100-120	2 × 750 N
double bed with one bed base	140-150	2 × 650 N / 750 N
	160	2 × 750 N / 1000 N
	180	2 × 1,000 N
double bed with two bed bases	140-160	4 × 450 N / 500 N
	180	4 × 500 N / 750 N

- calculated for bed length: 190-200 cm
- recommended types of pistons are informative (calculated for common slatted bed base and polyurethane mattress approx. 5 kg/m²)

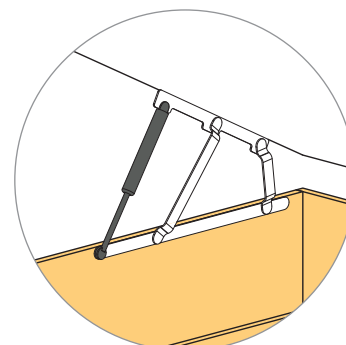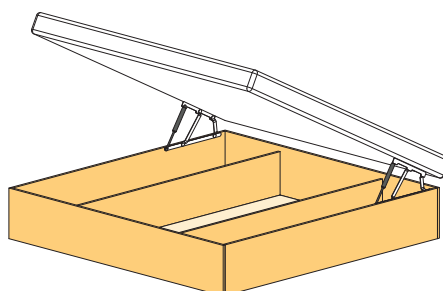


simple bed with longitudinal opening






Bed lifter KP09

code	colour
11455	white

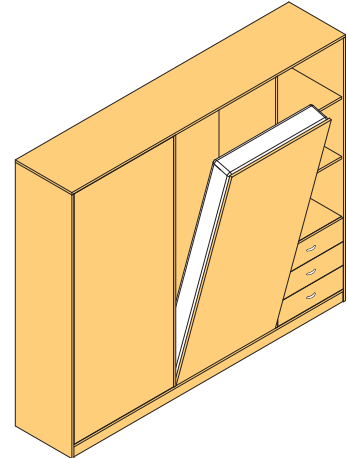



- all-metal enclosure with inner spring system
- set includes a complete pair of fittings
- for a minimum cabinet depth of 330 mm
- regulation of springs with a screw on the rear side
- use – folding beds
- can be used for both single and double beds
- maximum weight of bed structure should not exceed 70 kg (construction + bed base + mattress)
- only cabinet mechanism is included, without supporting leg solution
- spare spring 211055

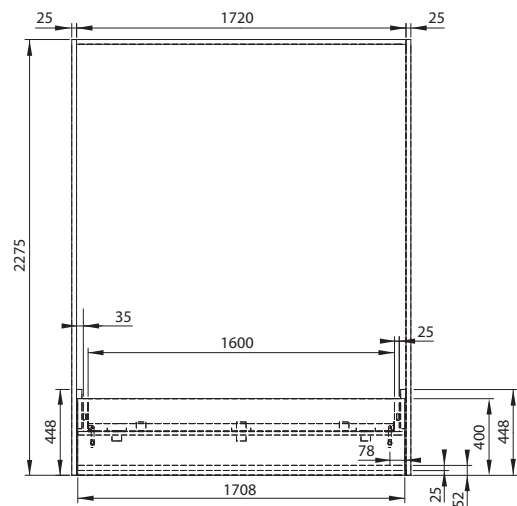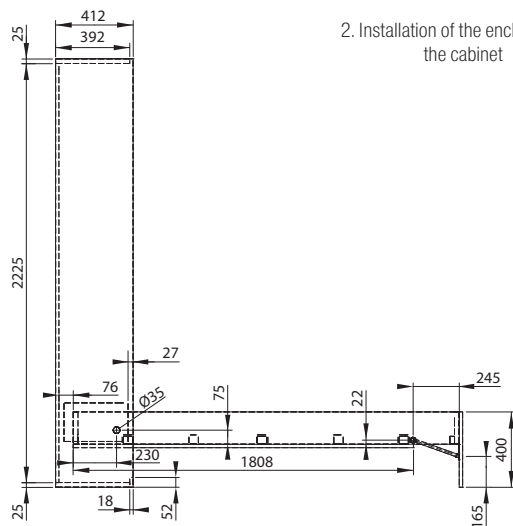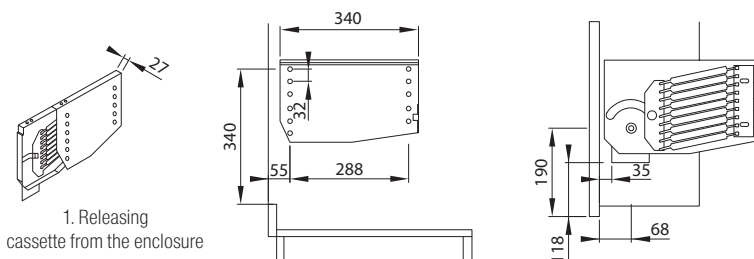


Hinge 50 × 50

code	description
392591	galvanised steel

- the outer diameter of the pin and the thickness of the hinge in the closed state is 8 mm
- plate thickness is 1 mm

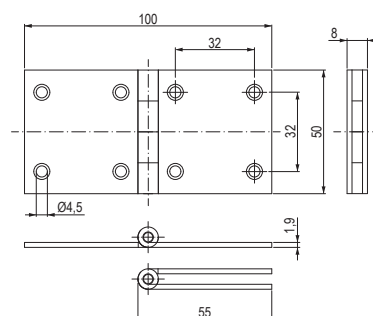





lifters and bed fittings

Bed lifter KP01

code	finish	ø of spring wire (mm)
11435	galvanised zinc	2.5



- fitting for transversal opening of beds with storage space
- single bed
- transversal opening
- minor lift
- suitable for recessed and overlay bed
- spare spring 11436

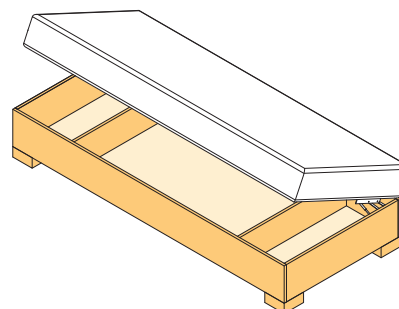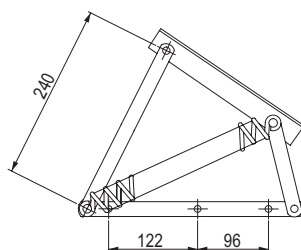

Bed lifter KP02

code	finish	ø of spring wire (mm)
11445	galvanised zinc	2.5

- fitting for longitudinal opening of beds with storage space
- single bed
- suitable for recessed and overlay bed
- spare spring 175857

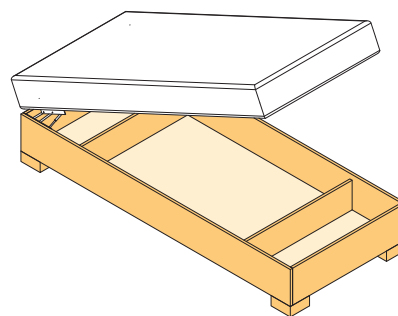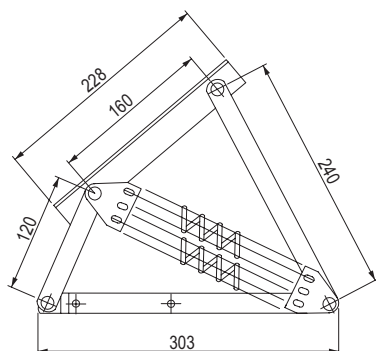


ACCESSORIES

Fitting cover

code	bed lifter	outer length (mm)	inner length (mm)
348055	KP03	450	400
348057	KP01, KP02	545	500
355734	KP04	790	750

- white colour
- sold by piece








Bed lifter KP03

code	finish	ø of spring wire (mm)
11431	galvanised zinc	2.5



- fitting for transversal opening of beds with storage space
- single bed
- increased lift (greater than KP01)
- suitable for recessed and overlay bed
- spare spring 11454

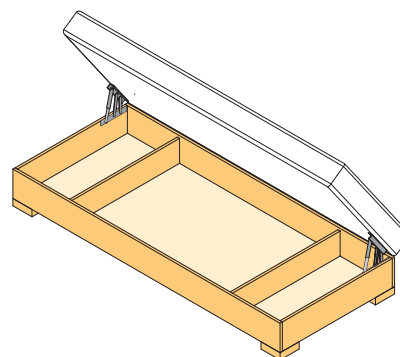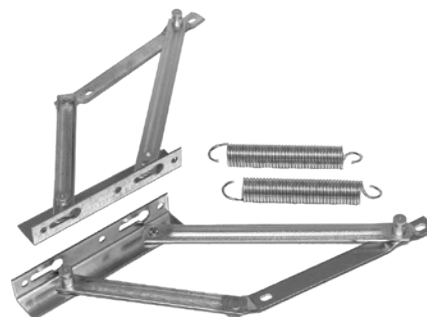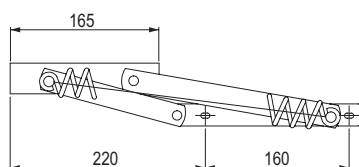


Bed lifter KP04

code	finish	ø of spring wire (mm)
11447	galvanised zinc	2.5

- fitting for longitudinal opening of beds with storage space
- double bed
- lift of the entire bed
- suitable for recessed and overlay bed
- spare spring 11452

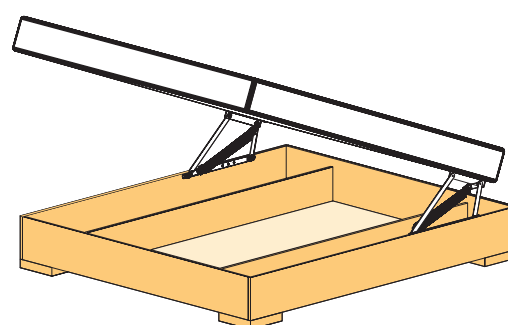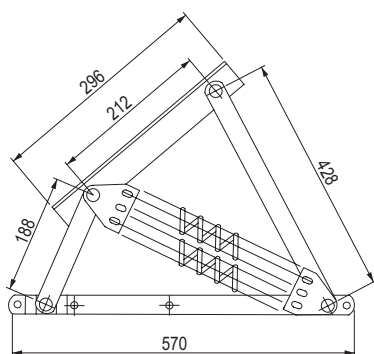




Rack bed fitting 130 mm



code	finish
11470	galvanised zinc

- set contains fitting for one bed

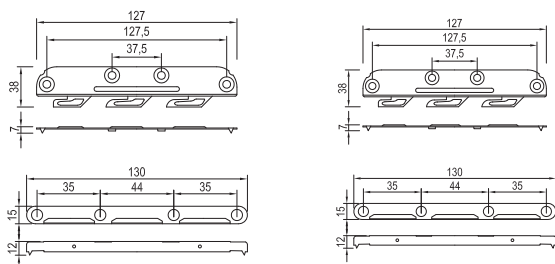


Bed positioning fitting for bed bases

code	finish
134587	galvanised zinc

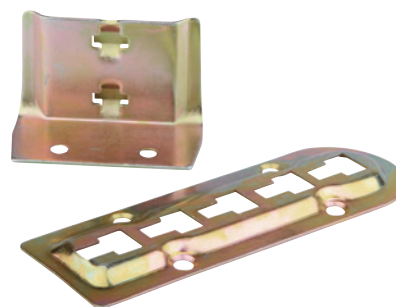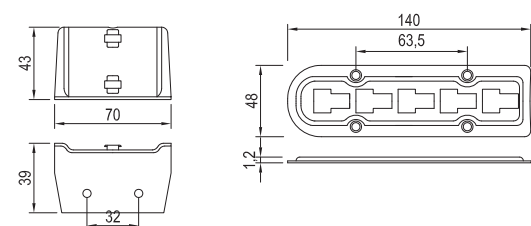



Angle bed connecting fitting 127


code	finish
153409	galvanised zinc

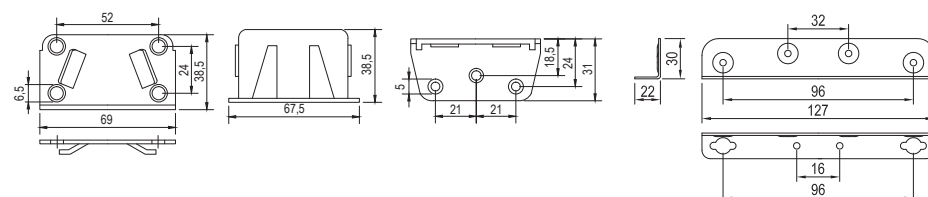

Angle bed connecting fitting 226


code	finish
153408	galvanised zinc

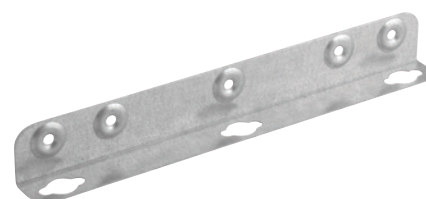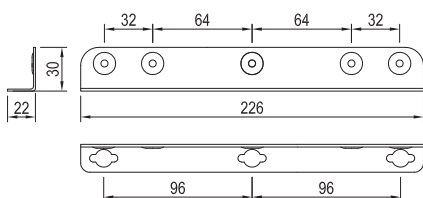



Central bed fitting

code	finish
11488	galvanised zinc

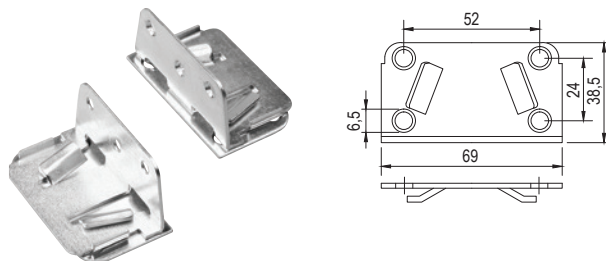


Adjustable legs for beds

code	height H (mm)	adjustment (mm)
132119	120	+ 100
132118	160	
132117	190	

Extension of adjustable legs for beds

code	material
224006	black plastic


- serves for extension of adjustable legs for beds by 50 mm

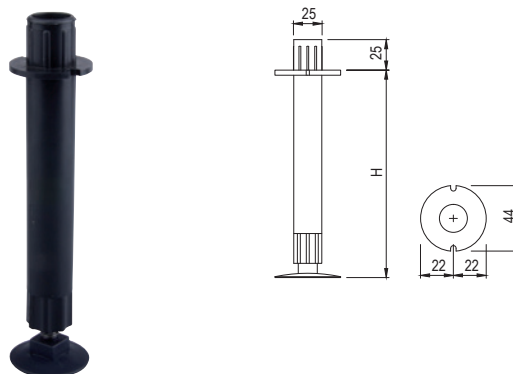

TV swivel – 80 kg

code	load capacity (kg)	height (mm)	dimensions (mm)
15660	80	8.5	81 × 81


- all-metal swivel
- rotation by 360°
- ball bearing
- use: TV tables, hi-fi tables

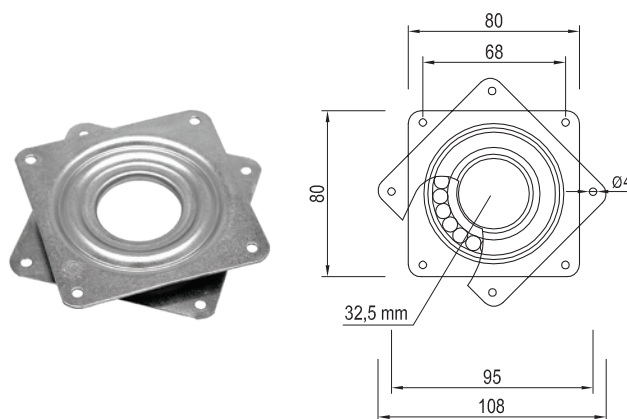

TV swivel – 150 kg

code	load capacity (kg)	height (mm)	dimensions (mm)
15661	150	11	155 × 155

- all-metal swivel
- rotation by 360°
- ball bearing
- use: TV tables, hi-fi tables

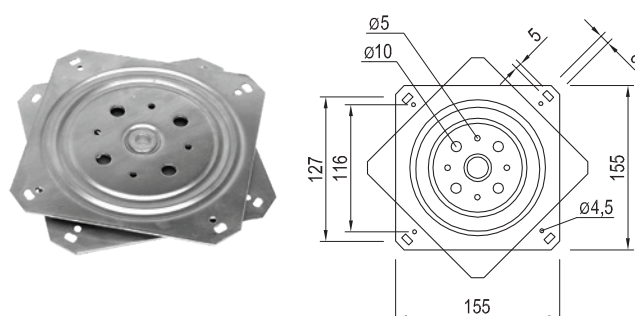



fittings for toilet cubicles

Fittings for toilet cubicles



Fittings for toilet cubicles

Offered fittings are made of AISI 304 stainless steel and structural elements of aluminium anodised profiles.


This makes them suitable for places with increased humidity, chlorine or salt content. Damp environment combined with compact boards is not a problem for these fittings and is therefore ideal for projects in swimming pools, changing rooms and others.

Individual components are ready for use with HPL compact board of 12 mm with complete connecting fittings. Fittings for other board thicknesses are available on request.

Set example:

The cubicle requires (depending on the type, number, ...):

- hinges (2-3 pcs for 1 door)
- set of cubicle lock and indicator
- door handle H38
- door backstop
- components for construction – choose from aluminium or stainless steel profiles depending on the type
- adjustable leg
- angle brackets





U profile
367888
367889
367890




Angle bracket
248244
(for corner connection of
boards or wall mounting)



Adjustable
leg
310841

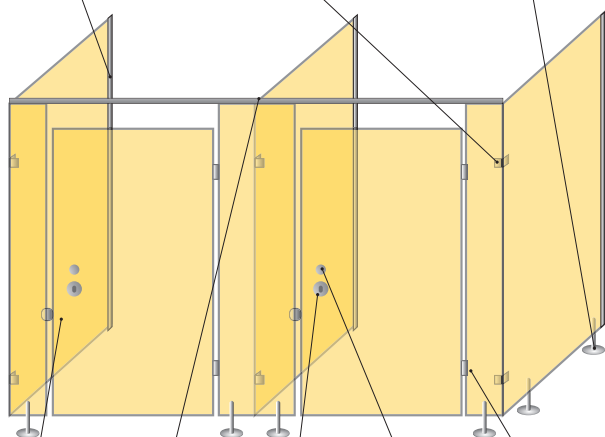


Door backstop
248243



Top profile
e.g. 394393



Cubicle lock
with indicator
248238



Door
handle
248242



Hinges
e.g. 248249

Overview of components

Straight hinges for screw fixing

code	description
248251	Toilet hinge, left SH70 12 mm
248252	Toilet hinge, right SH70 12 mm

Offset hinges for screw fixing

code	description
248253	Toilet hinge left offset VSH70 for 12 mm
248254	Toilet hinge right offset VSH70 for 12 mm

Hinges for mounting with screws

code	description
248249	Toilet hinge left H70 for 12 mm
248250	Toilet hinge right H70 for 12 mm
340564	Toilet hinge left H70 for 18 mm
340565	Toilet hinge right H70 for 18 mm

fittings for toilet cubicles



Overview of components

Cubicle lock with indicator

code	description
248238	cubicle lock with indicator, 12 mm, for classic hinge
320750	cubicle lock with indicator, 18 mm, for classic hinge
248239	cubicle lock with indicator, 12 mm, for offset hinge

- simple cubicle locks with engaged/vacant indicator without key
- supplied with connecting fittings

Angle bracket

code	description
248244	for corner connection of boards or wall mounting

- connecting fittings not included

Backstop

code	description
248243	door backstop, 12 mm

- supplied with connecting fittings

Handle

code	description
248242	door handle H38

- handle (knob) is most often placed above the lock
- supplied with connecting fittings

Adjustable leg

code	description
310841	height: 150 mm, 12 mm
320753	height: 150 mm, 18 mm

- supplied with connecting fittings

Construction accessories

code	description
248259	Toilet connecting pipe 32 mm, length: 3 m
248258	Toilet connecting pipe 32 mm, length: 1 m
248260	Toilet pipe wall attachment
310516	Toilet top fixing clamp, type T, for 12 mm ¹⁾
340563	Toilet top fixing clamp, type T, for 18 mm ¹⁾
248261	Toilet corner pipe connector 90° ²⁾
248262	Toilet T pipe connector ³⁾

¹⁾ Delivered with connecting fittings for the installation of 12 mm or 18 mm boards. Used to connecting pipe extension and board mounting.

²⁾ Used to corner connection of pipes.

³⁾ Used to connecting pipe extension and upright connecting pipe connection.

Top guide

code	description
394391	Toilet anodised aluminium top profile 13/32 mm, for cubicles, length: 1.98 m
394392	Toilet anodised aluminium top profile 13/32 mm, for cubicles, length: 3.96 m
394393	Toilet anodised aluminium top profile 13/32 mm, for cubicles, length: 5.95 m
394394	Toilet anodised aluminium top profile 18/25 mm, for cubicles, length: 1.98 m
394395	Toilet anodised aluminium top profile 18/25 mm, for cubicles, length: 3.96 m
394396	Toilet anodised aluminium top profile 18/25 mm, for cubicles, length: 5.95 m

- the top guide is double-sided, always for two thicknesses
- can be fastened to the board using a stainless steel screw or aluminium rivets with a stainless steel pin (not included)
- profile is impacted on the board forming the cubicle front wall

U profile

code	description
367888	Toilet anodised aluminium U side profile 13 mm, length: 1.95 m
367889	Toilet anodised aluminium U side profile 19 mm, length: 1.98 m
367890	Toilet anodised aluminium U side profile 25 mm, length: 2.10 m

- U profile is mounted on the wall
- the board forming the cabin wall is impacted on the profile
- the board must be secured to the profile with bolts or screws (not included)







Bed connecting fitting



code	Hettich code	package
105284	25185	10 sets

- total height: 100 mm
- suspension part with 2 hooks
- especially suitable for narrow sideboards of the bed
- blue passivated steel
- 1 set includes:
 - 2 × suspension part with hooks, right
 - 2 × suspension part with hooks, left
 - 4 × bearing part, left/right

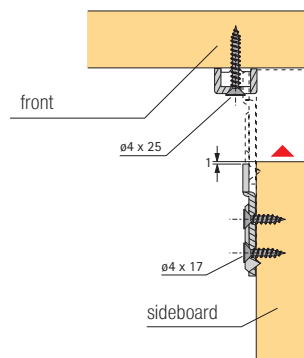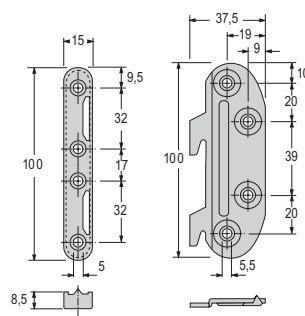

code	Hettich code	package
105286	25183	10 sets



- total height: 130 mm
- suspension part with 3 hooks
- stable and well-tried fitting for suspension mounting
- blue passivated steel
- 1 set includes:
 - 2 × suspension part with hooks, right
 - 2 × suspension part with hooks, left
 - 4 × bearing part, left/right

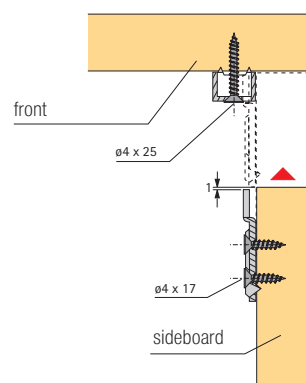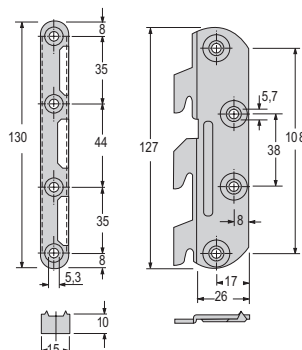

Bed connecting fitting 127 mm

code	Hettich code
108008	25189

- set includes: 1 angle bracket, 2 enclosures M6 × 13, 2 screws M6 × 12
- chromated steel

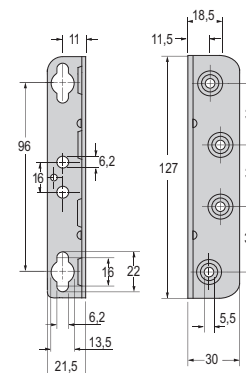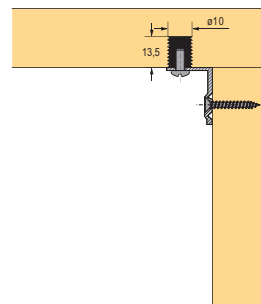




Angle bed connecting fitting 226 mm

code	Hettich code
108009	47635


- holes for screws, pitch: 32 mm
- suitable particularly for high sideboards
- set includes: 1 angle bracket,
3 enclosures M6 × 13, 3 screws M6 × 12
- chromated steel

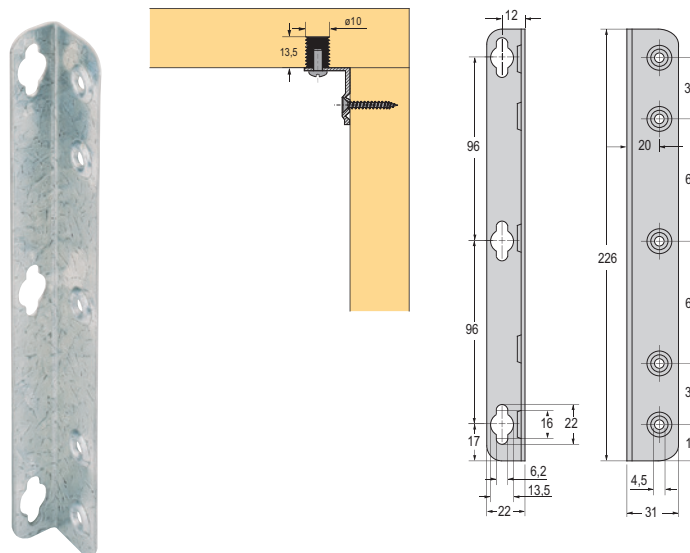

StabiloFix

code	Hettich code
108016	47634



- for dismantlable upholstered beds or bedclothes drawers
- high strength, adjustable by up to 4 mm
- chromated steel

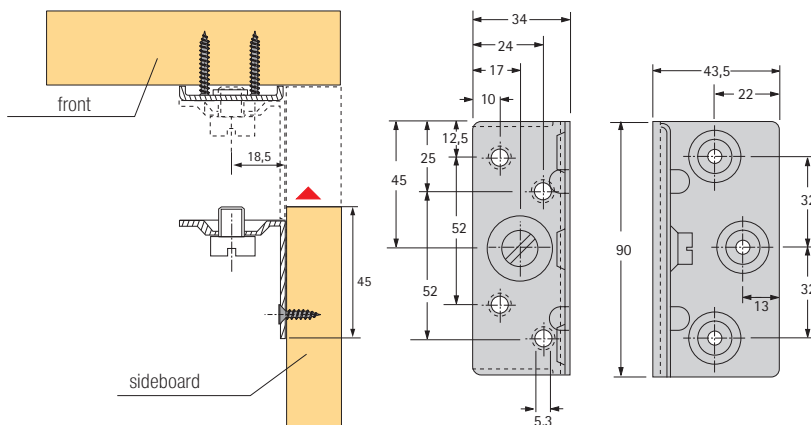

Varifix – height-adjustable bed fitting

code	Hettich code
105292	47633

- positioning of slat bed bases or upholstery is adjustable to three heights with a pitch of 24 mm
- can be used for a double bed with a central line
- blue passivated steel

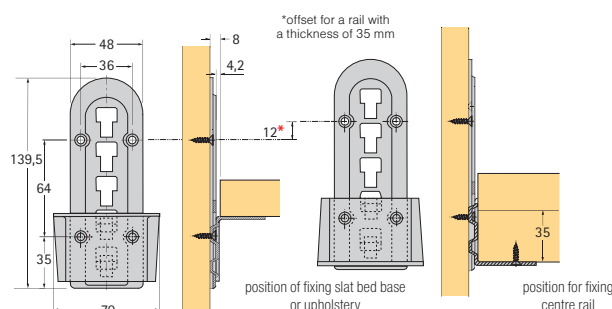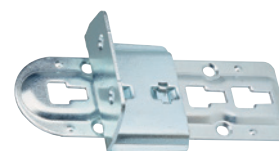




Supporting leg for centre rail

code	Hettich code	dimension X (mm)	adjustment (mm)
105955	47631	170	- 22/+ 96
105958	47632	190	- 42/+ 76



- ideal use in combination with Varifix bed fitting
- black plastic
- 20 pcs in package

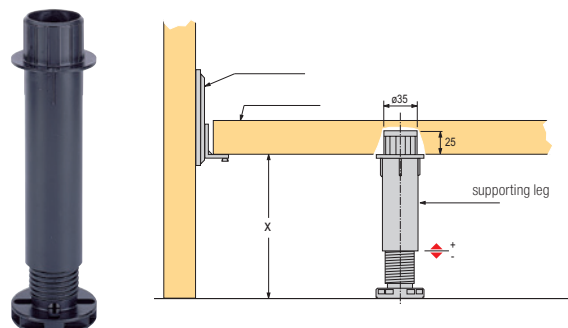

Centre rail connector

code	Hettich code
103927	25182

- for beds with wooden or metal structure
- can also be used for upholstered beds
- chromated steel

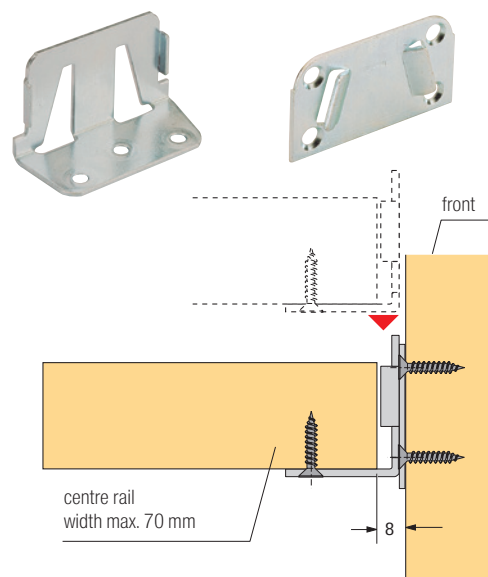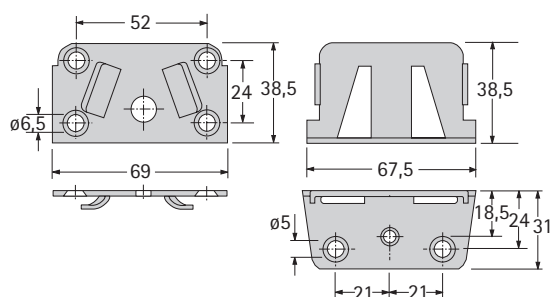



Rastomat

code	Hettich code
105281	25174

- positioning fitting for head and leg part
- number of positions: 10
- can be used also for height adjustable desktops, deck chairs, benches, etc.
- the fitting will engage in any position without back run
- stable construction
- overtightening is eliminated thanks to a steel lock
- spacers are included in the supply
- blue passivated steel



	dimension X (mm)
	10 positions
1 R	234.5
5 R	288
10 R	354

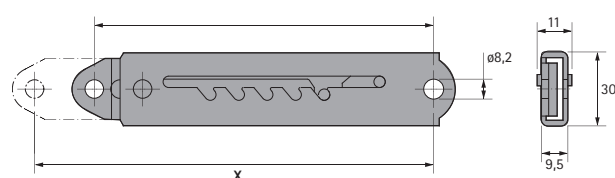
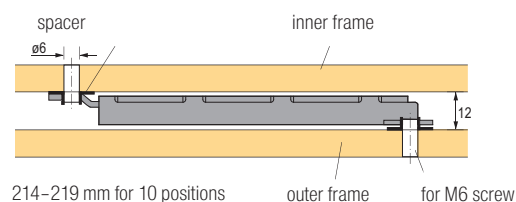




Multiflex

code	Hettich code
105283	25173

- positioning fitting for head and leg part
- 13 positions
- especially low built-in height
- simple and quick mounting
- blue passivated steel

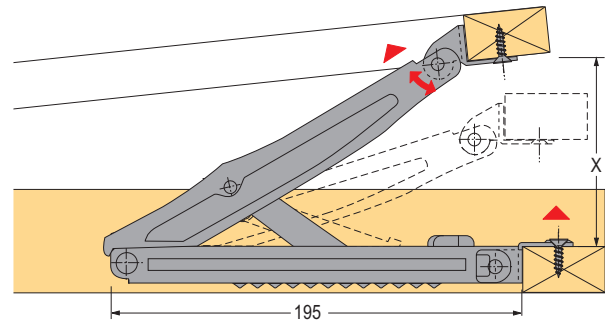
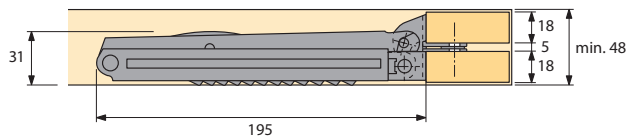


Position	0	1	2	3	4	5	6	7	8	9	10	11	12	13	Backstop mm (max. opening)
Dimension X (mm)	5	29	69	99	124	143	160	176	193	207	223	240	257	278	

Spring fitting for beds

code	Hettich code
104943	9132738

- all riveted connections with washers for stability
- spring prestress supports tilting
- weight of bed base including 25 kg mattress
- inserted structure must be supported on all 4 sides
- plastic cover protects bedclothes in storage space
- only available as a set consisting of one right and one left fitting
- chromated steel

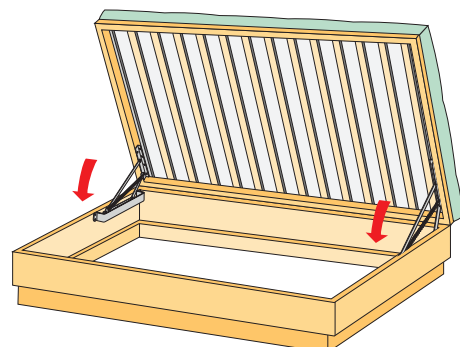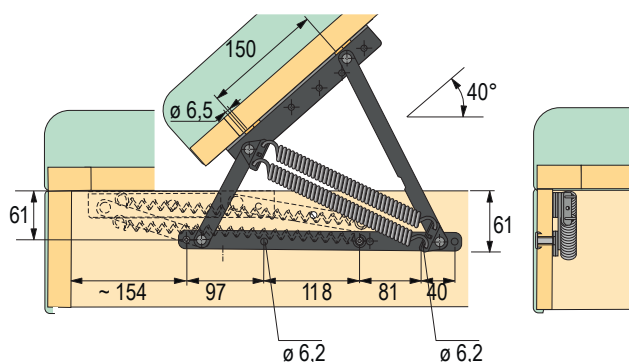




Fitting for connecting individual parts of seating

N CoFix M

code	description
407039	basic part
407040	suspension lid, double-sided
407041	suspension lid, one-sided
407042	support part

- the seat is easily unfolded and folded at the target place
- simplifies production, facilitates storage and optimizes the transported volume
- reduce claims costs due to damage to furniture during handling

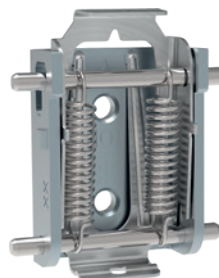


407039




407040




407041

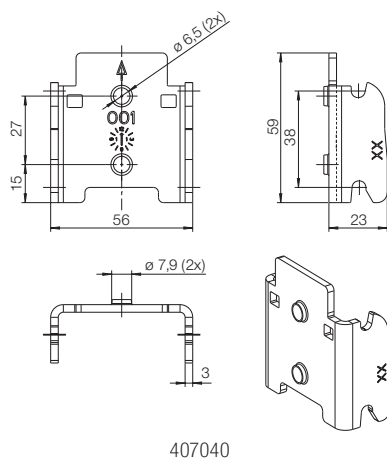


407040

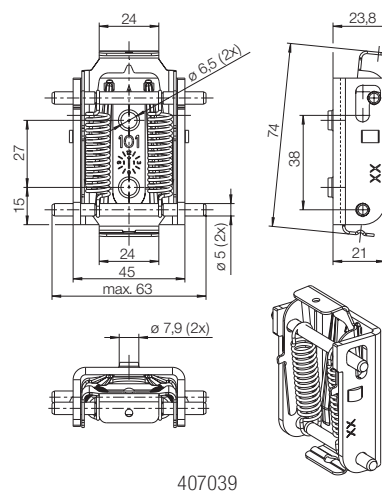

407039

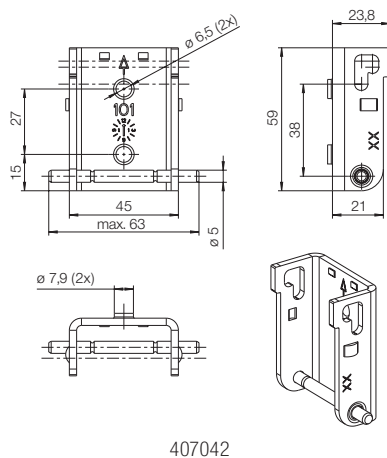


407042

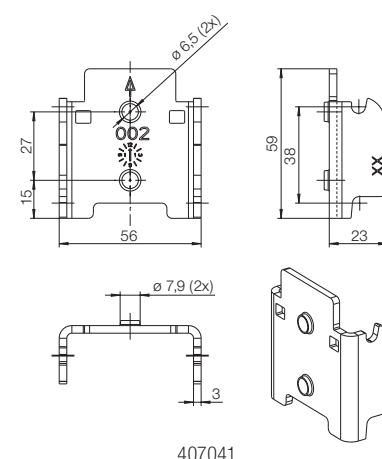

407041


fittings for upholstery production




N Plug-in connecting fitting

code	type
407044	type 1
407045	type 2

- quick mounting
- usable left and right
- galvanised steel

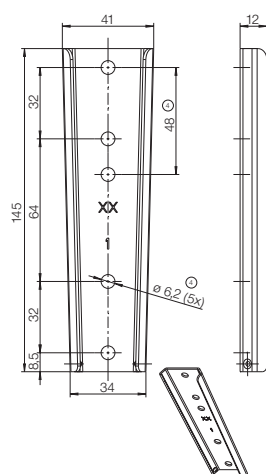

407044

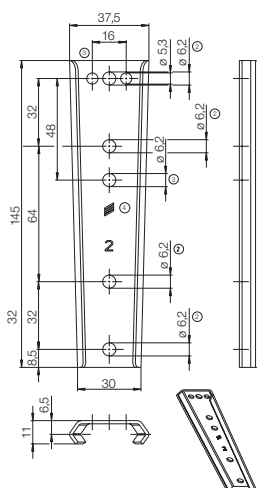

407045



407044 + 407045